

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103546 A1

- (51) International Patent Classification⁷: A61F 5/01
- (21) International Application Number: PCT/NL03/00414
- (22) International Filing Date: 5 June 2003 (05.06.2003)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:
1020776 6 June 2002 (06.06.2002) NL
- (71) Applicant (for all designated States except US): KVLMT,
B. V. [NL/NL]; Palatijn 13, NL-7521 PN Enschede (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BESELINK,
Mark, Stefan [NL/NL]; Goudsbloemstraat 44, NL-7531
DE Enschede (NL). VAN LEERDAM, Nicolaas, Ger-
ardus, Adrianus [NL/NL]; Parijsstraat 19, NL-7559 KN

Hengelo (NL). VAN DER WOUDE, Jurrie [NL/NL]; Ter
Wadding 8, NL-7608 LH Almelo (NL).


(74) Agent: SCHUMANN, Bernard, Herman, Johan, Ir.;
Schumann Patent Consultancy B.V., Boddenkampstraat 51,
NL-7522 BZ Enschede (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: PROSTHESIS OR ORTHESIS WITH REDUCED CONTACT FRICTION

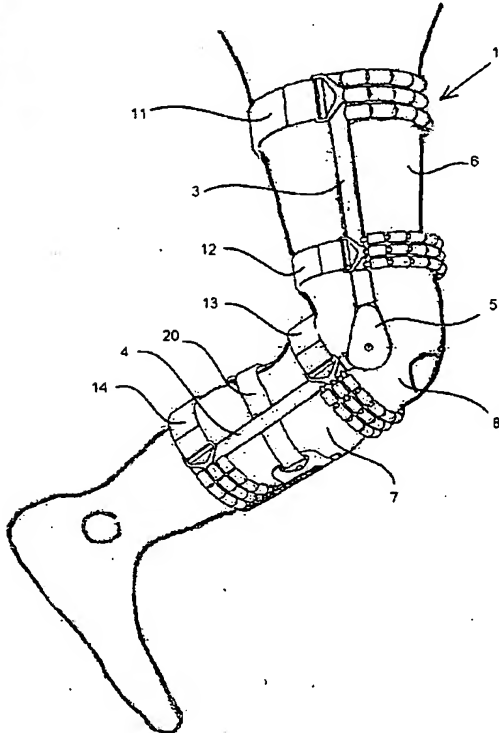

(57) Abstract: An orthopedic device comprises: a structure comprising two substantially rigid parts, for instance two rods, which parts are coupled to each other by means of hinge means and each comprise fastening means for optional temporary fastening to a limb part, wherein a pivot axis of the hinge means extends at least more or less in the region and in the direction of the pivot axis zone of the relevant joint. The device has the feature according to the invention that the fastening means are at least partly provided with friction-reducing means on at least the side to be brought into contact with the relevant limb part.

WO 03/103546 A1

WO 03/103546 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, — with amended claims
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.